


MRIYA WIFI

WIFI AUDIO BUG & VOICE RECORDER INTEGRATED 5V TRAVEL ADAPTER

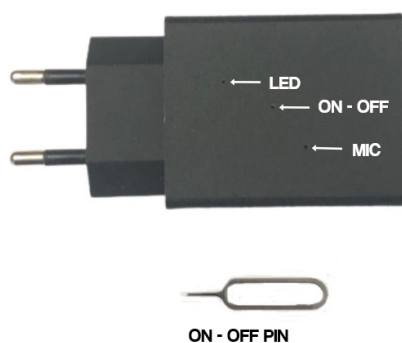

Look at a side of travel adapter and locate 3 small holes, use ON-OFF pin for following operations:

POWER ON:

Press ON/OFF button for 2 seconds, blue light turns ON, release button, red light goes OFF

POWER OFF:

Press ON/OFF button for 2 seconds, blue light slow flashing, release button, red light goes OFF

PAIRING MODE:

When device is in ON mode, short press ON/OFF button, blue light start fast flashing and continue till device is paired via mobile app

CHARGING:

Connect adapter to 220V, backup battery will start charging automatically. Device can work connected to 220V without any limits. USB socket work normally and can power & charge any USB device

TECHNICAL SPECIFICATIONS:

Dimensions: 90x42x22 mm

Working time : unlimited when adapter is connected in 220V

Backup battery capacity: 500mAh (used only when cable is disconnected from 220V)

Backup battery duration: 7 hours live listening (Wifi ON, Recording ON)

24 hours in standby (Wifi standby, Recording standby)

7 days in sleep (Wifi sleep, Recording standby)

Connectivity: 2,4Ghz wifi network (5G wifi network is not supported)

SD card: micro SD 32 Gb integrated, (capable to record 512 hours)

Recording : WaV format , 128kbps, Voice activation, memory consumption 1Mb/ minute , 512 hours /32Gb

Downloading over Wifi speed: 1min recording / 5 sec download

5 min recording / 25 sec download

10 min recording / 1 min download